



## Specifications for Modular Dryers :

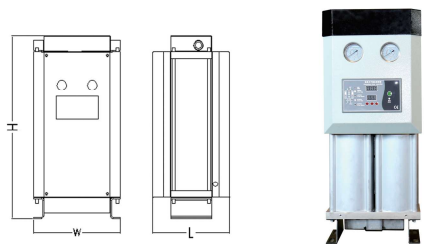

Model	Capacity(m <sup>3</sup> /min)	Connection size	LxWxH(mm)	Weight(KG)
SPD-016	1.6	G1	325*240*790	42
SPD-026	2.5	G1	325*240*1090	55
SPD-035	3.5	G1	325*240*1390	72

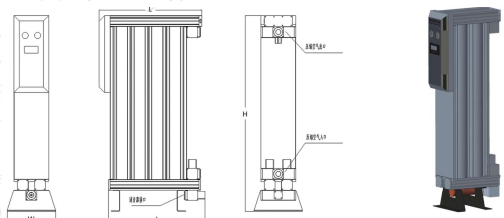


Model	Capacity(m <sup>3</sup> /min)	Connection size	LxWxH(mm)	Weight(KG)
SPD-070	7.0	G1-1/2	615*445*1600	155
SPD-105	10.5	G2	777*445*1600	212
SPD-140	14.0	G2-1/2	939*445*1600	270
SPD-175	17.5	G2-1/2	1101*445*1600	325
SPD-210	21.0	G2-1/2	1263*445*1600	385
SPD-245	24.5	G2-1/2	1425*445*1600	440
SPD-280	28.0	G2-1/2	1587*445*1600	500
SPD-350	35.0	DN80	1101*445*1600	670
SPD-420	42.0	DN100	1263*445*1600	770
SPD-490	49.0	DN125	1425*445*1600	880
SPD-560	56.0	DN125	1587*445*1600	1000
SPD-630	63.0	DN150	1263*445*1600	1155
SPD-735	73.5	DN150	1425*445*1600	1320
SPD-840	84.0	DN150	1587*445*1600	1500

Notes: The treated air is converted into the suction state value of air compressor (32 °C at atmospheric pressure and 75% relative humidity), and the treatment conditions are as follows: inlet 35 °C / unsaturated (no water drops), inlet air pressure 0.69 MPa, and ambient temperature 32 °C.

连接示意图 Connection Diagram

满足各行业的需求 Meet the requirements of all industries

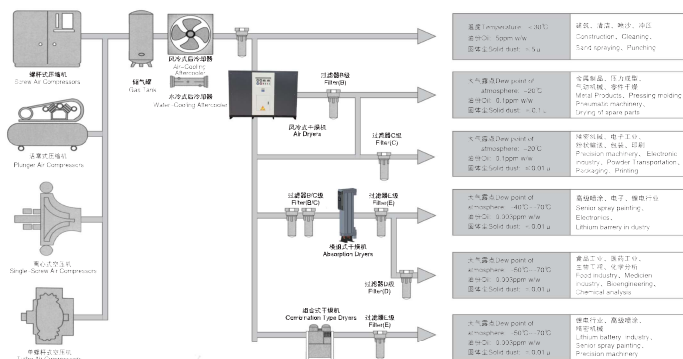

温度 Temperature: <math>-20^{\circ}\text{C}</math> 露点 Dew point: <math>-5^{\circ}\text{C}</math> 流量 Flow rate: <math>1\text{~}5\text{ m}^3/\text{min}</math>	涂装, 涂装, 喷涂, 涂油 Coating, Coating, Spray painting, Painting
大气露点 Dew point of atmosphere: <math>-20^{\circ}\text{C}</math> 流量 Flow: <math>1\text{~}10\text{ m}^3/\text{min}</math> 露点 Dew point: <math>-2^{\circ}\text{C}</math>	吹瓶, 瓶塞, 压片, 压片, 压片, 压片, 压片, 压片 Blow bottles, Bottle caps, Pressing tablets, Pressing tablets, Pressing tablets, Pressing tablets, Pressing tablets, Pressing tablets
大气露点 Dew point of atmosphere: <math>-20^{\circ}\text{C}</math> 流量 Flow: <math>1\text{~}10\text{ m}^3/\text{min}</math> 露点 Dew point: <math>-2^{\circ}\text{C}</math>	颗粒, 颗粒, 颗粒, 颗粒, 颗粒, 颗粒 Particles, Particles, Particles, Particles, Particles, Particles
大气露点 Dew point of atmosphere: <math>-40^{\circ}\text{C}</math> 流量 Flow: <math>1\text{~}20\text{ m}^3/\text{min}</math> 露点 Dew point: <math>-20^{\circ}\text{C}</math>	医药, 电子, 医药, 医药, 医药, 医药 Pharmaceutical, Electronics, Pharmaceutical, Pharmaceutical, Pharmaceutical, Pharmaceutical
大气露点 Dew point of atmosphere: <math>50^{\circ}\text{C}</math>-<math>70^{\circ}\text{C}</math> 流量 Flow: <math>1\text{~}20\text{ m}^3/\text{min}</math> 露点 Dew point: <math>-20^{\circ}\text{C}</math>	食品, 食品, 食品, 食品, 食品, 食品 Food, Food, Food, Food, Food, Food
大气露点 Dew point of atmosphere: <math>50^{\circ}\text{C}</math>-<math>70^{\circ}\text{C}</math> 流量 Flow: <math>1\text{~}20\text{ m}^3/\text{min}</math> 露点 Dew point: <math>-20^{\circ}\text{C}</math>	锂电, 锂电, 锂电, 锂电, 锂电, 锂电 Lithium battery, Lithium battery, Lithium battery, Lithium battery, Lithium battery, Lithium battery

携手发展  
Develop Together  
共赢未来  
Win The Future

盐城天尔机械有限公司  
YANCHENG TIANER MACHINERY CO.,LTD

地址: 江苏省盐城市大丰区大中工业园区富康路23号  
ADD: No. 23, Fukang Road, Dazhong industrial park, Yancheng Jiangsu, China



创新诚信 团结共赢



盐城天尔机械有限公司  
YANCHENG TIANER MACHINERY CO.,LTD.